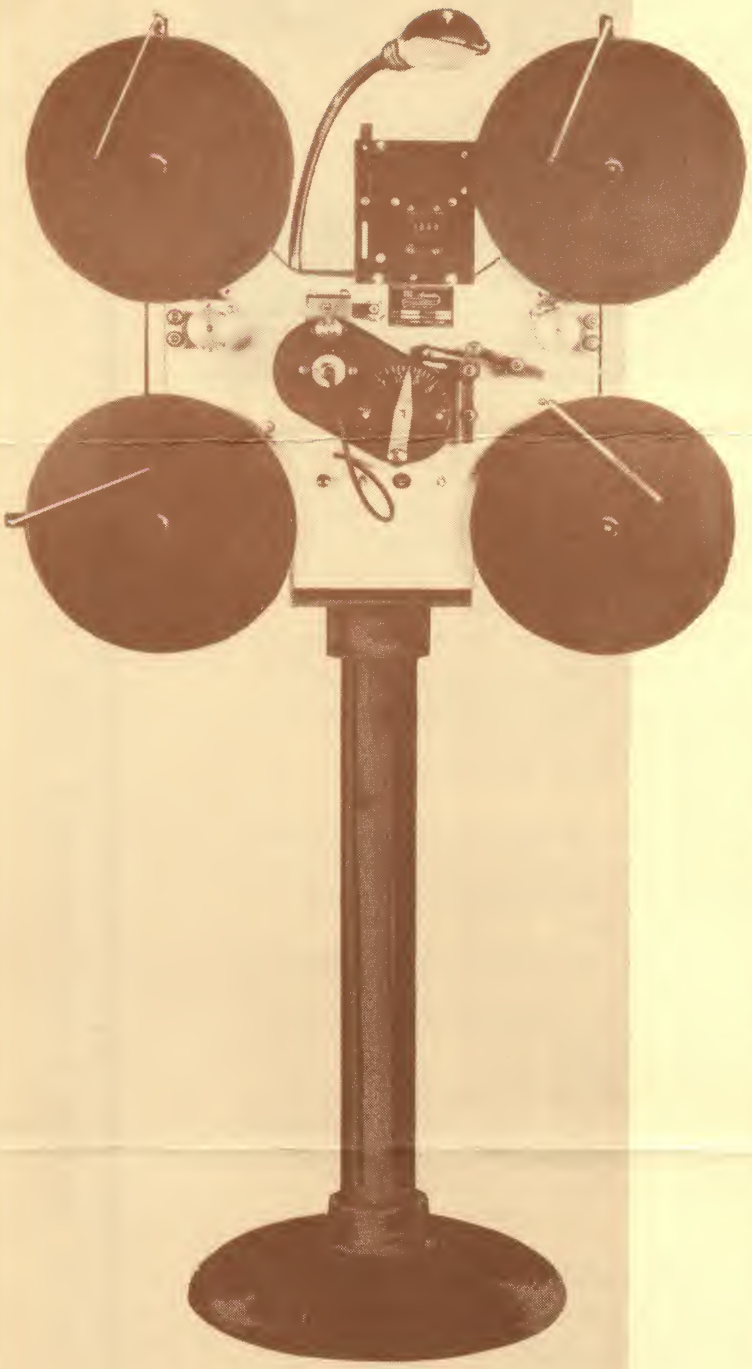

S.O.S. TEL-Amatic PRINTER

(Model B)

New Improved 21 Scene Light Change For Professional 16mm Printing!

An improved continuous contact sound and picture printer for double 8mm and 16mm films. Has outstanding features never achieved before in the low cost field. Now labs, TV stations, producers, educational institutions and advertising agencies can print their own film in truly professional fashion. Designed for color, black and white, reversal, sound or silent films. TEL-Amatic does them all with rock-steady professional precision. Sufficient light is provided to expose fine grain film. Semi-automatic 21 light change assures perfect exposure.

SOS TEL-AMATIC PRINTER 16mm (model B)

SOS PHOTO-CINE-OPTICS, INC.

East Coast: 602 west 52nd street
new york 19, n. y. • 212-PL-7-0440

West Coast: 6331 hollywood blvd.
hollywood 28, calif. • 213-467-2124

EST. 1926

Everything For The
Motion Picture and
Television Industry

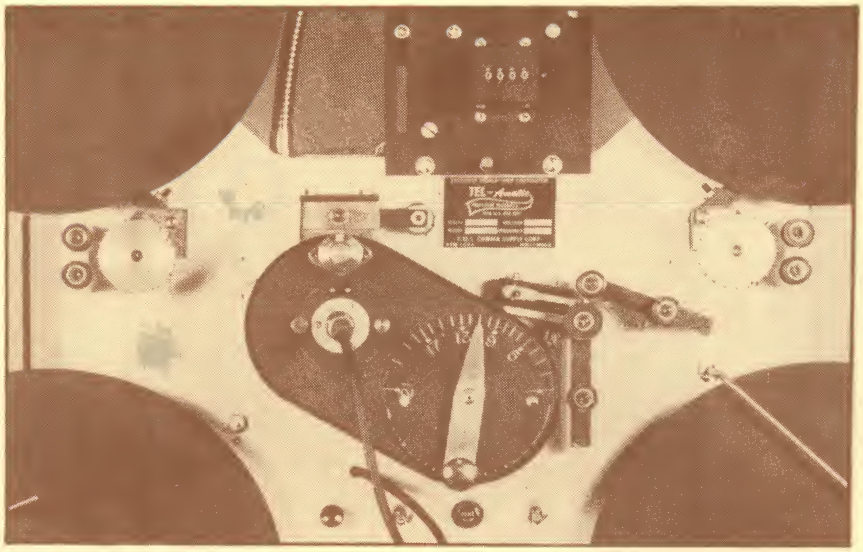

ACCESSORIES

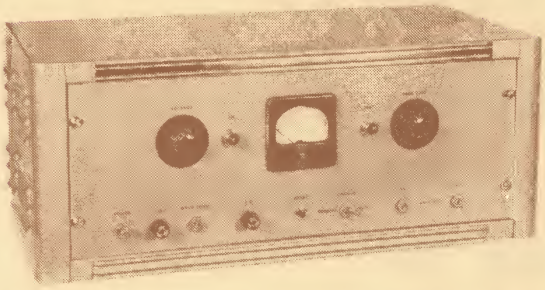

FADE-AMATIC POWER SUPPLY . . $495.00

A D.C. printing lamp supply featuring a fade and dissolve system continuously variable within a range of 8 to 64 frames. Operation may be automatically notch controlled or activated manually by a push button on the front panel. Red and green pilot lights show the fade-in and fade-out cycle. Output is automatically held to plus or minus 1%, even with fluctuations of 35 volts in the input. Large voltmeter on the front panel for settings.

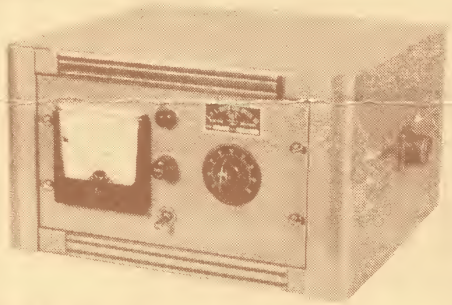

TEL-AMATIC D.C. LAMP CONTROL $375.00

Regulated output of 0-8V, 0-4 amperes D.C. Less than 1% hum at maximum output. Power source: 90-140V 60 cycle single phase. Complete with meter (0-5 amperes).

TEL-AMATIC LIGHT CHANGE CARDS, per 100 . . . . . $ 3.00
TEL-AMATIC FILM NOTCHER to operate with light change control . . $ 14.95
Adapt for single 8mm $250.00
Add for 50 cycle . . . . . $ 50.00

SPECIFICATIONS

1 Semi-automatic 21 scene mechanical light change for frame light change.
2 Large capacity of 1200 ft.
3 Rapid speed of 43 ft. per minute.
4 Six-volt lamp, 4 amp., S.C.P. prefocused.
5 Precision 40-tooth printing sprocket for proper registration. Sprocket rotates on a large diameter main shaft.
6 Separate 20-tooth feed and take-up sprockets.
7 Feed and take-up shoes replace pad rollers.
8 Four-way aperture for: ST-Sound Track only, RR-Reversal, NP-Negative Picture and FA-Full Aperture.
9 Lamp Holder accommodates CC Filters for color printing.
10 Footage counter and light change card indicator included.
11 Constant speed motor with gear reduction. Power source: 115 V. AC 60 Cy. 260 watts. Height: 60" • Depth: 18" • Width: 32" Weight: 100 lbs.
12 Hinged cover for servicing.

TEL-AMATIC PRINTER mounted on Slimline floor pedestal

~~$2495.00~~ 2750.-

*Combination TEL-Amatic printer with DC lamp control . . . . . ~~$3700.00~~ 3025
with FADE-AMATIC Power Supply . . . . . ~~$2990.00~~ 3245

TEL-AMATIC with supply comes completely ready to PLUG-IN and print!

SOS TEL-Amatic Printer for 16mm (model B)

Phone: 212-MU 9-9150

Cable: SOSOUND

SOS

SOS PHOTO-CINE-OPTICS, INC.

387 PARK AVENUE SOUTH, NEW YORK, N. Y. 10016

December 15, 1966

Mr. T. Nelson
Box 1546
Poughkeepsie, N. Y. 12603

Dear Mr. Nelson:

Thank you so much for your card, requesting information on our Tel-Amatic Printer.

Please see enclosed descriptive literature and specifications. As you can see the prices have been increased effective October 1966. Delivery on the Printer is approximately 60 days after receipt of your order.

GREETINGS OF THE SEASON!

Cordially yours,

Michael Sloun

MICHAEL SLOUN
SALES ENGINEER

MS:HM
Tel-Amatic Printer